



OFFICINE MARIO DORIN SINCE 1918

DORIN[®]
INNOVATION




CD 系列

SEMI-HERMETIC MOTOR COMPRESSORS
TRANSCRITICAL CO₂ APPLICATION - 50/60 Hz

二氧化碳跨临界压缩机系列
跨临界CO₂应用50/60Hz



DORIN Web Software

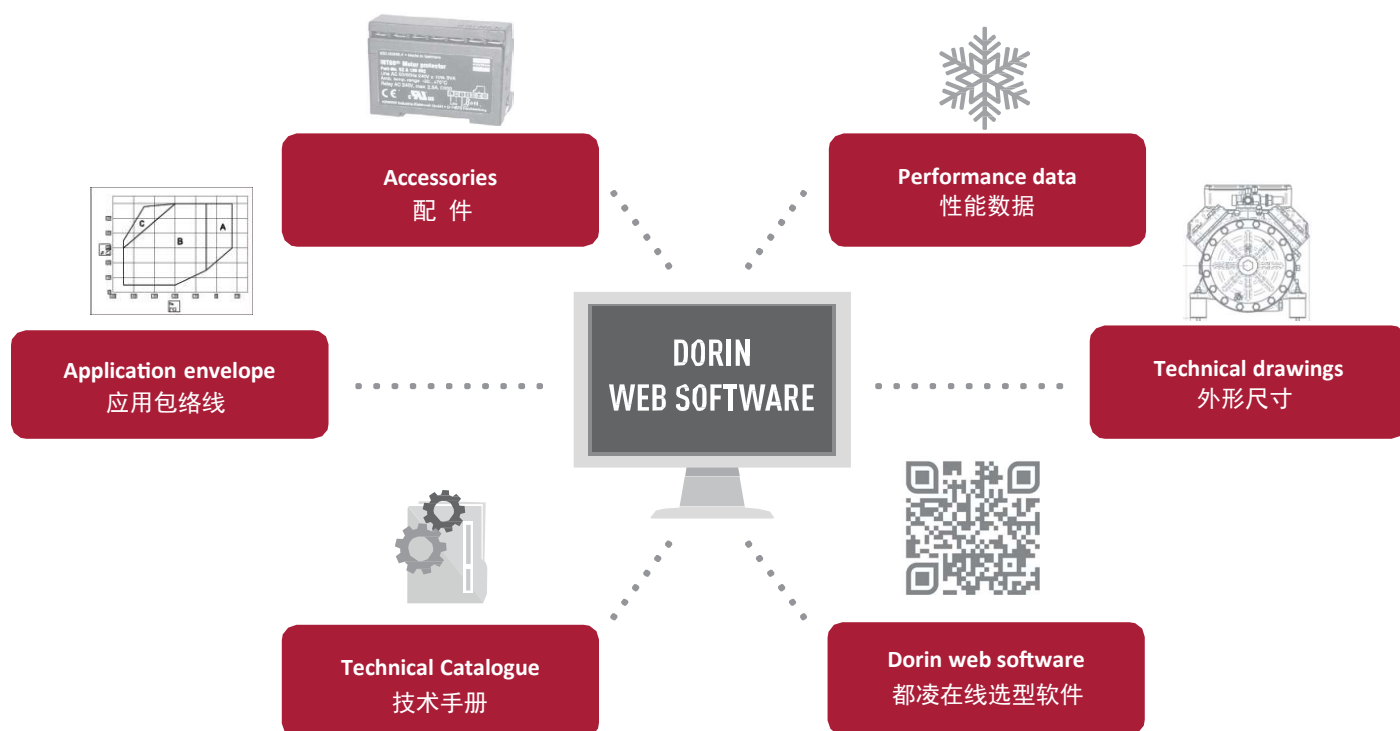

Frequency Range

变频范围



* Maximum operating frequency to be checked in the dedicated technical bulletin

* 最大运行频率须参阅专门的技术手册

Compressor certifications

都凌压缩机认证



Factory certifications

都凌工厂认证

ISO 45001:2018

ISO 9001:2015

Compressor design pressure

压缩机设计压力

100 bar

Standstill pressure
静止压力

150 bar

Max discharge pressure
最大排气压力

CD SERIES Features

CD系列产品特点

**Silent operations and low vibrations**

运行安静流畅，振动水平低

Crankshafts balanced individually and excellent fluid dynamics studies are our strengths
曲轴能够独立平衡运转，这得益于我们出色的流体动力学研究

**All models VFD compatible**

所有型号可变频运行

Bore / Stroke values and generous motor sizings allow wide frequency ranges
电机、缸径、行程的优化配比使之可以实现宽频运行

**Highest levels of efficiency**

优异的运行效率

Using latest coating technologies for reducing frictions and improving lubrication
采用最新的涂层技术来减少摩擦和改善润滑

**Peculiar oil containment system for extra low oil carry-over for models with oil pump**

专利认证的油气分离系统，可显著降低带油泵型号的带油率

Higher system efficiency, less oil injections from the oil-separator for higher oil viscosity in the compressor sump
更高的系统效率，油分离器中的润滑油量大幅减少，压缩机中油的粘度得以提高

**2 years standard warranty**

两年标准质保

**All compressors suitable for transcritical CO₂**

所有压缩机适用于跨临界CO₂应用

**Salt spray resistance test, certified for 1000 hours (NSS test in accordance with UNI EN ISO 4628, parts 2,3,8- Assessment method : UNI EN ISO 9227**

盐雾耐受性测试，已通过1000小时认证（根据UNI EN ISO 4628第2、3、8部分的评估方法进行NSS测试）：
UNI EN ISO 9227

**Compact design and reduced gross weight**

轻量化和紧凑地设计

Optimized displacement values for crankcase size
根据曲轴箱大小对应的最优排量

CD Series Technical Features

CD系列技术特点

1

Extra reliability and efficiency of optimized valve plate design
最优化的阀板设计保证了可靠性和效率

2


IP65 junction box
防护等级IP65的电气接线盒

3

Enhanced lubrication secured by automotive design
汽车工业设计，保证更好地润滑


4

Proven reliability of the electric motor thanks to the unique resistance to high temperatures
由于独特的耐高温设计，电机的可靠性得到了保证

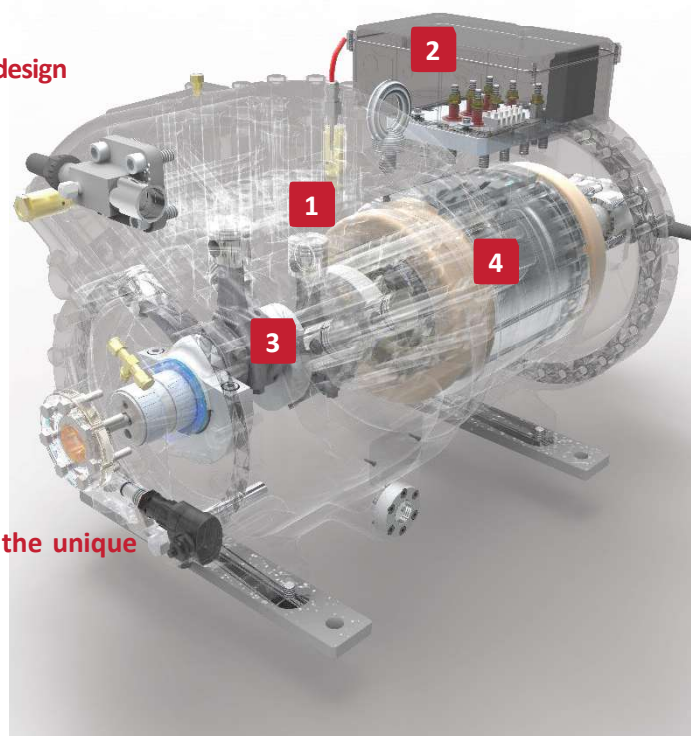

CD Series – Displacement 50 Hz

CD系列-排量50Hz

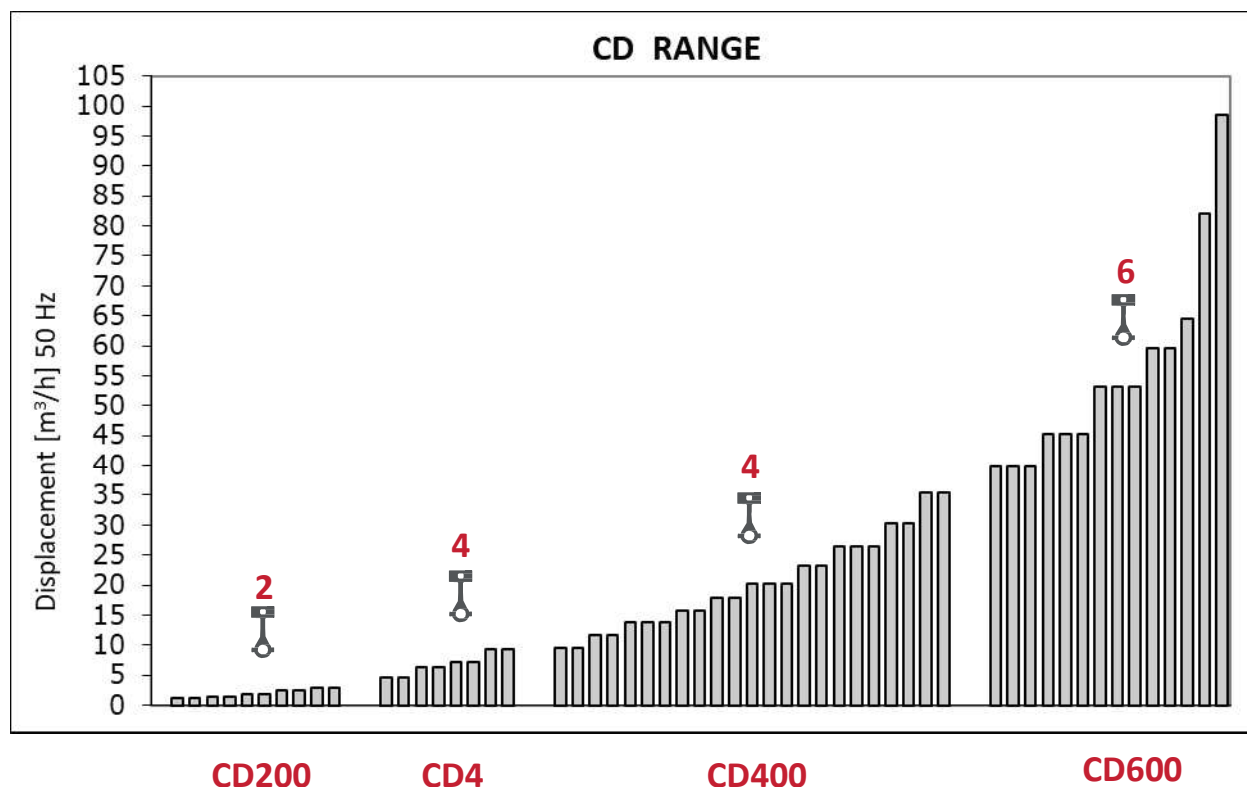

THE WIDEST CO₂ COMPRESSOR RANGE IN THE MARKET

FROM 1,12 m³/h UP TO 60 m³/h @ 50 Hz

CO₂ SINGLE STAGE TRANSCRITICAL COMPRESSORS

市面上最广的跨临界CO₂压缩机排量，从1.12m³/h-60m³/h@50Hz

CD SERIES

Model name for CD200-CD400 range

CD200-CD400 型号命名

CD	3500	H
SERIES 系列	HP * 100 匹数	H HIGH-MEDIUM EVAPORATING TEMPERATURE 高中蒸发温度
		M MEDIUM-LOW EVAPORATING TEMPERATURE 中低蒸发温度
		B LOW EVAPORATING TEMPERATURE 低蒸发温度

Model name for CD4-CD600 range

CD4-CD600 型号命名

CD	6	901	59	M
SERIES 系列	NUMBER OF CYLINDERS 缸数	HP * 100 匹数	DISPLACEMENT VOLUME 排量	H HIGH-MEDIUM EVAPORATING TEMPERATURE 高中蒸发温度
				M MEDIUM-LOW EVAPORATING TEMPERATURE 中低蒸发温度
				B LOW EVAPORATING TEMPERATURE 低蒸发温度

Applications CD SERIES

CD系列的应用



Industrial Refrigeration
工业制冷



Railway HVAC
轨道交通



Logistic Warehouse
物流仓储



Heat Pumps
热泵应用



Commercial Refrigeration
商超制冷



Bus A/C
公交空调



Refrigerated Transport
冷链运输



Stationary HVAC
暖通空调

Standard And Optional Accessories

标配件和选配件

	● STANDARD 标配	○ OPTIONAL 选配	MODEL 型号			
			CD200	CD4	CD400	CD600
 Motor Protection (MT) 电机保护 CD200 range is equipped with the Thermik protection: a normally closed contact that trips in case the motor winding temperature is $140 \pm 5^\circ\text{C}$. From CD4 series and above compressors are equipped with a PTC probe on every motor winding set at 120°C. The sensor requires an external protection module to read the signal from the probe (BT008) CD200系列配备了Thermik保护装置：一种常闭的接触器，当电机绕组温度达到 $140 \pm 5^\circ\text{C}$ 时跳闸。从CD4系列开始，压缩机的每个电机绕组都装有一个PTC探头，设定在 120°C，传感器需要一个外部保护模块来读取探头的信号。	●		●	●	●	●
 Electronic Protection Module (REL) 电子保护模块 Keeping under constant control winding temperature and discharge temperature) (BT007) 确保电机绕组温度和压缩机排气温度在允许温度内。 (参考技术手册BT007)	○		●	●	●	●
 Crankcase Heater (CH) 曲轴箱加热器 The heater is 100 W for CD200 and CD4 included and 200 W for CD400 and CD600 series (BT001) CD200和CD4系列使用100W曲轴箱加热器， CD400和CD600系列使用200W曲轴箱加热器	○		○	○	○	○
 Self-regulating crankcase heater (TCH) 自适应曲轴箱加热器 Increasing the energy efficiency and reducing the warm-up time. The thermal regulated crankcase heater reduces the output power once the set temperature is reached. Depending on the working conditions there is up to 30% energy saving compared to the standard heater (BT001) 与传统加热器相比，自适应曲轴箱加热器可提高能效并减少预热时间。一旦达到设定温度，自适应曲轴箱加热器会降低输出功率。节能情况视不同工况而变，与传统的曲轴箱加热器相比，最多可节省30%的耗能。(参见技术手册BT001)	○		○	○	○	○
 Maximum discharge temperature sensor (TMAX) / 最大排气温度传感器 A thermistor probe is monitoring the discharge temperature to be kept below 160°C (BT007) PTC探头监控压缩机排气温度，确保其保持在 160°C 以下 (参考技术手册BT007)	-		-	-	○	●

Standard And Optional Accessories

标配件和选配件


**Oil differential pressure switch (ODPS) /
电子油压差开关 (ODPS)**

Compressors with oil pump are equipped with an oil differential pressure switch set at 0,85 bar differential. The oil pressure switch must be connected in series to both thermistors module and all other protections foreseen in the system chain alarm (BT007) /

带油泵的压缩机配备了一个油压差开关，设定在0.85 bar的压差。油压差开关必须与热敏电阻模块和系统报警控制回路中预设的所有其他保护装置串联连接（BT007）


**Oil charge /
冷冻油充注**

All compressors are charged in the factory with POE or PAG oil before the mechanical and electrical running tests /

标配POE或PAG冷冻油



**Oil pump forced lubrication (FL) /
油泵润滑**

CD400 range- optional for models
CD1500M/CD2000H/CD1200B/CD2000M/CD2400H/CD1500B/CD2500H
Not available for CD1200M/CD1400H
Standard for other models.

CD400系列以下型号的油泵为选配件：CD1500M/CD2000H/CD1200B/
CD2000M/CD2400H/CD1500B/CD2500H

以下型号不能使用油泵：CD1200M/CD1400H

其它系列所有型号油泵标配

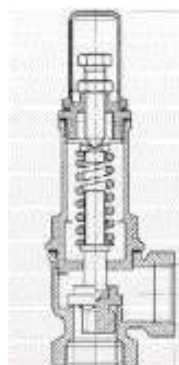
**LP and HP valve (LPSV-HPSV) /
高压和低压安全阀**

	MODEL 型号			
● STANDARD ○ OPTIONAL 标配 选配	CD200	CD4	CD400	CD600
Oil differential pressure switch (ODPS) / 电子油压差开关（ ODPS ） Compressors with oil pump are equipped with an oil differential pressure switch set at 0,85 bar differential. The oil pressure switch must be connected in series to both thermistors module and all other protections foreseen in the system chain alarm (BT007) / 带油泵的压缩机配备了一个油压差开关，设定在0.85 bar的压差。油压差开关必须与热敏电阻模块和系统报警控制回路中预设的所有其他保护装置串联连接（ BT007 ）	-	-	○ ●	●
Oil charge / 冷冻油充注 All compressors are charged in the factory with POE or PAG oil before the mechanical and electrical running tests / 标配POE或PAG冷冻油	●	●	●	●
Oil pump forced lubrication (FL)/ 油泵润滑 CD400 range- optional for models CD1500M/CD2000H/CD1200B/CD2000M/CD2400H/CD1500B/CD2500H Not available for CD1200M/CD1400H Standard for other models. CD400系列以下型号的油泵为选配件：CD1500M/CD2000H/CD1200B/ CD2000M/CD2400H/CD1500B/CD2500H 以下型号不能使用油泵：CD1200M/CD1400H 其它系列所有型号油泵标配	-	-	○ ●	●
LP and HP valve (LPSV-HPSV)/ 高压和低压安全阀	●	●	●	●

CD SERIES

Oil Charge / Service Valves / Net Weight

油量/阀门/净重

RANGE 系列	MODEL 型号	CYLINDERS 缸数	OIL CHARGE 油量	SUCTION 吸气阀		DISCHARGE 排气阀		NET WEIGHT 净重
		[-]	[LITERS]	Socket welding 承插焊 [mm]	Butt welding 对焊 [mm]	Socket welding 承插焊 [mm]	Butt welding 对焊 (mm)	[kg]
CD200	CD 150M	2	1,3	10	14	10	14	71
	CD 180H	2	1,3	10	14	10	14	72
	CD 180M	2	1,3	10	14	10	14	73
	CD 300H	2	1,3	10	14	10	14	73
	CD 300M	2	1,3	10	14	10	14	73
	CD 350H	2	1,3	10	14	10	14	76
	CD 350M	2	1,3	10	14	10	14	76
	CD 360H	2	1,3	10	14	10	14	78
	CD 360M	2	1,3	10	14	10	14	77
	CD 380H	2	1,3	10	14	10	14	77
CD4	CD4 55-4,7M	4	1,7	22	28	18	24	117
	CD4 75-4,7H	4	1,7	22	28	18	24	117
	CD4 75-6,4M	4	1,7	22	28	18	24	117
	CD4 90-6,4H	4	1,7	22	28	18	24	117
	CD4 75-7,3M	4	1,7	22	28	18	24	120
	CD4 90-7,3H	4	1,7	22	28	18	24	120
	CD4 90-9,2M	4	1,7	22	28	18	24	119
	CD4 120-9,2H	4	1,7	22	28	18	24	121
CD400	CD 1200M	4	2,5	22	28	22	28	164
	CD 1400H	4	2,5	22	28	22	28	164
	CD 1500M	4	2,5	22	28	22	28	164
	CD 2000H	4	2,5	22	28	22	28	164
	CD 1200B	4	2,5	22	28	22	28	164
	CD 2000M	4	2,5	22	28	22	28	164
	CD 2400H	4	2,5	22	28	22	28	168
	CD 1500B	4	2,5	22	28	22	28	164
	CD 2500H	4	2,5	22	28	22	28	168
	CD 2500M	4	2,5	22	28	22	28	172
	CD 3000H	4	2,5	22	28	22	28	178
	CD 2001B	4	2,5	22	28	22	28	168
	CD 3001M	4	2,5	22	28	22	28	178
	CD 3401H	4	2,5	22	28	22	28	187
	CD 2501B	4	2,5	22	28	22	28	172
	CD 3501H	4	2,5	22	28	22	28	187
	CD 3001B	4	2,5	22	28	22	28	178
	CD 3501M	4	2,5	22	28	22	28	187
	CD 4501H	4	2,5	22	28	22	28	199
	CD 3501B	4	2,5	28	35	22	28	199
	CD 5001M	4	2,5	28	35	22	28	202
	CD 4001B	4	2,5	28	35	22	28	199
	CD 5201M	4	2,5	28	35	22	28	202
CD600	CD6 501-40B	6	4,8	42s	-	28s	35	415
	CD6 601-40M	6	4,8	42s	-	28s	35	425
	CD6 701-40H	6	4,8	42s	-	28s	35	435
	CD6 501-45B	6	4,8	42s	-	28s	35	412
	CD6 701-45M	6	4,8	42s	-	28s	35	439
	CD6 801-45H	6	4,8	42s	-	28s	35	445
	CD6 501-53B	6	4,8	42s	-	28s	35	413
	CD6 801-53M	6	4,8	42s	-	28s	35	445
	CD6 901-53H	6	4,8	42s	-	28s	35	452
	CD6 1200-58H	6	4,8	42s	-	28s	35	502
	CD6 601-59B	6	4,8	42s	-	28s	35	428
	CD6 901-59M	6	4,8	42s	-	28s	35	452
	CD6 701-65B	6	4,8	54s	-	35s	-	439
	CD6 1200-65M	6	4,8	54s	-	35s	-	502
	CD6 1400-65H	6	4,8	54s	-	35s	-	530
	CD6 1400-72M	6	4,8	54s	-	35s	-	530
	CD6 1600-72H	6	4,8	54s	-	35s	-	562
	CD6 801-82B	6	4,8	54s	-	35s	-	445
	CD6 901-99B	6	4,8	54s	-	42s	-	452

CD SERIES

Electric Motor FLA (Full Load Ampere)

最大工作电流（满载电流）

RANGE 系列	MODEL 型号	DISPLACEMENT 排 量		MAX OPERATING CURRENT 最大工作电流 V / ph / Hz [A]														MAX ABSORBED POWER 最大输入功率	
		50 Hz [m3/h]	60 Hz [m3/h]	220-240 / 1 / 50	208-230 / 1 / 60	115 / 1 / 60	220-240 / 3 / 50 265-290 / 3 / 60 D	380-420 / 3 / 50 440-480 / 3 / 60 Y	208-230 / 3 / 60 D	360-400 / 3 / 60 Y	200 / 3 / 50-60 D	380-420 / 3 / 50 440-480 / 3 / 60 PWS	220-240 / 3 / 50 PWS	208-230 / 3 / 60 PWS	360-400 / 3 / 60 PWS	475-525 / 3 / 50 570-630 / 3 / 60	50 Hz [kW]	60 Hz [kW]	
CD200	CD150M	1,12	1,35	-	-	-	5,9	3,4	7,1	4,1	-	-	-	-	-	2,7	2,0	2,4	
	CD 180H	1,12	1,35	-	-	-	7,6	4,4	9,1	5,3	-	-	-	-	-	3,5	2,6	3,2	
	CD 180M	1,46	1,76	-	-	-	7,6	4,4	9,1	5,3	-	-	-	-	-	3,5	2,6	3,2	
	CD 300H	1,46	1,76	-	-	-	10,4	6,0	12,5	7,2	-	-	-	-	-	4,8	3,6	4,4	
	CD 300M	1,88	2,25	-	-	-	10,4	6,0	12,5	7,2	-	-	-	-	-	4,8	3,6	4,4	
	CD 350H	1,88	2,25	-	-	-	12,6	7,3	15,1	8,7	-	-	-	-	-	5,8	4,2	5,1	
	CD 350M	2,39	2,87	-	-	-	12,6	7,3	15,1	8,7	-	-	-	-	-	5,8	4,2	5,1	
	CD 360H	2,39	2,87	-	-	-	16,2	9,4	19,4	11,2	-	-	-	-	-	7,5	5,5	6,6	
	CD 360M	3,00	3,6	-	-	-	12,9	7,5	15,5	8,9	-	-	-	-	-	6,0	4,4	5,3	
	CD 380H	3,00	3,6	-	-	-	16,2	9,4	19,4	11,2	-	-	-	-	-	7,5	5,5	6,6	
CD4	CD4 55-4,7M	4,67	5,6	-	-	-	25,0	14,5	30,0	17,4	-	14,5	-	-	-	11,6	8,7	10,5	
	CD4 75-4,7H	4,67	5,6	-	-	-	34,0	19,5	41,0	23,5	-	19,5	-	-	-	15,6	11,4	13,7	
	CD4 75-6,4M	6,40	7,68	-	-	-	34,0	19,5	41,0	23,5	-	19,5	-	-	-	15,6	11,4	13,7	
	CD4 90-6,4H	6,40	7,68	-	-	-	40,0	23,0	48,0	27,5	-	23,0	-	-	-	18,4	13,8	16,6	
	CD4 75-7,3M	7,28	8,74	-	-	-	34,0	19,5	41	23,5	-	19,5	-	-	-	15,6	11,4	13,7	
	CD4 90-7,3H	7,28	8,74	-	-	-	40,0	23,0	48,0	27,5	-	23,0	-	-	-	18,4	13,8	16,6	
	CD4 90-9,2M	9,21	11,05	-	-	-	40,0	23,0	48	27,5	-	23,0	-	-	-	18,4	13,8	16,6	
	CD4 120-9,2H	9,21	11,05	-	-	-	41,5	24,0	50	28,8	-	24,0	-	-	-	19,2	14,5	17,4	
CD400	CD 1200M	9,48	11,37	-	-	-	48,5	28,0	58	33,5	-	28,0	48,5	58	33,5	22,5	16,8	20,2	
	CD 1400H	9,48	11,37	-	-	-	59	34,0	71	41,0	-	34,0	59	71	41,0	27,0	19,5	23,4	
	CD 1500M	11,69	14,03	-	-	-	59	34,0	71	41,0	-	34,0	59	71	41,0	27,0	19,5	23,4	
	CD 2000H	11,69	14,03	-	-	-	66	38,0	79	45,5	-	38,0	66	79	45,5	30,5	22,7	27,2	
	CD 1200B	13,84	16,61	-	-	-	48,5	28,0	58	33,5	-	28,0	48,5	58	33,5	22,5	16,8	20,2	
	CD 2000M	13,84	16,61	-	-	-	66	38,0	79	45,5	-	38,0	66	79	45,5	30,5	22,7	27,2	
	CD 2400H	13,84	16,61	-	-	-	78	45,0	93	54	-	45,0	78	93	54	36,0	26,6	31,9	
	CD 1500B	15,72	18,86	-	-	-	59	34,0	71	41,0	-	34,0	59	71	41,0	27,0	19,5	23,4	
	CD 2500H	15,72	18,86	-	-	-	78	45,0	93	54	-	45,0	78	93	54	36,0	26,6	31,9	
	CD 2500M	17,84	21,41	-	-	-	78	45,0	93	54	-	45,0	78	93	54	36,0	26,6	31,9	
	CD 3000H	17,84	21,41	-	-	-	97	56	116	67	-	56	97	116	67	45,0	33,4	40,1	
	CD 2001B	20,15	24,18	-	-	-	66	38,0	79	45,5	-	38,0	66	79	45,5	30,5	22,7	27,2	
	CD 3001M	20,15	24,18	-	-	-	97	56	116	67	-	56	97	116	67	45,0	33,4	40,1	
	CD 3401H	20,15	24,18	-	-	-	130	75	156	90	-	75	130	156	90	60	44,9	53,9	
	CD 2501B	23,3	27,96	-	-	-	78	45,0	93	54	-	45,0	78	93	54	36,0	26,6	31,9	
	CD 3501H	23,3	27,96	-	-	-	130	75	156	90	-	75	130	156	90	60	44,9	53,9	
	CD 3001B	26,45	31,74	-	-	-	97	56	116	67	-	56	97	116	67	45,0	33,4	40,1	
	CD 3501M	26,45	31,74	-	-	-	130	75	156	90	-	75	130	156	90	60	44,9	53,9	
	CD 4501H	26,45	31,74	-	-	-	139	80	166	96	-	80	139	166	96	64	48,4	58,1	
	CD 3501B	31,04	37,25	-	-	-	130	75	156	90	-	75	130	156	90	60	44,9	53,9	
	CD 5001M	31,04	37,25	-	-	-	161	93	193	112	-	93	161	193	112	74	56,6	67,9	
	CD 4001B	35,47	42,56	-	-	-	139	80	166	96	-	80	139	166	96	64	48,4	58,1	
	CD 5201M	35,47	42,56	-	-	-	161	93	193	112	-	93	161	193	112	74	56,6	67,9	

Electric Motor FLA (Full Load Ampere)

最大工作电流 (满载电流)

RANGE 系列	MODEL 型号	DISPLACEMENT 排 量		MAX OPERATING CURRENT 最大工作电流 V / ph / Hz [A]														MAX ABSORBED POWER 最大输入功率	
		50 Hz [m3/h]	60 Hz [m3/h]	220-240 / 1 / 50	208-230 / 1 / 60	115 / 1 / 60	220-240 / 3 / 50 265-290 / 3 / 60 D	380-420 / 3 / 50 440-480 / 3 / 60 Y	208-230 / 3 / 60 D	360-400 / 3 / 60 Y	200 / 3 / 50-60 D	380-420 / 3 / 50 440-480 / 3 / 60 PWS	220-240 / 3 / 50 PWS	208-230 / 3 / 60 PWS	360-400 / 3 / 60 PWS	475-525 / 3 / 50 570-630 / 3 / 60	50 Hz [kW]	60 Hz [kW]	
CD600	CD6 501-40B	39,85	47,82	-	-	-	156	90	187	108	-	90	156	187	108	72	52,4	62,9	
	CD6 601-40M	39,85	47,82	-	-	-	182	105	218	126	-	105	182	218	126	84	62,0	74,4	
	CD6 701-40H	39,85	47,82	-	-	-	208	120	249	144	-	120	208	249	144	96	73,0	87,6	
	CD6 501-45B	45,34	54,41	-	-	-	156	90	187	108	-	90	156	187	108	72	52,4	62,9	
	CD6 701-45M	45,34	54,41	-	-	-	208	120	249	144	-	120	208	249	144	96	73,0	87,6	
	CD6 801-45H	45,34	54,41	-	-	-	256	148	308	178	-	148	256	308	178	118	83,0	99,6	
	CD6 501-53B	53,21	63,85				156	90	187	108	-	90	156	187	108	72	52,4	62,9	
	CD6 801-53M	53,21	63,85	-	-	-	256	148	308	178	-	148	256	308	178	118	83,0	99,6	
	CD6 901-53H	53,21	63,85	-	-	-	294	170	353	204	-	170	294	353	204	136	99,2	119,0	
	CD6 1200-58H	57,65	69,18	-	-	-	320	185	385	222	-	185	320	385	222	148	123,0	147,6	
	CD6 601-59B	59,53	71,44	-	-	-	182	105	218	126	-	105	182	218	126	84	62,0	74,4	
	CD6 901-59M	59,53	71,44	-	-	-	294	170	353	204	-	170	294	353	204	136	99,2	119,0	
	CD6 701-65B	64,49	77,39	-	-	-	208	120	249	144	-	120	208	249	144	96	73,0	87,6	
	CD6 1200-65M	64,49	77,39	-	-	-	320	185	385	222	-	185	320	385	222	148	123,0	147,6	
	CD6 1400-65H	64,49	77,39	-	-	-	364	210	436	252	-	210	364	436	252	168	124,7	149,6	
	CD6 1400-72M	71,72	86,06	-	-	-	364	210	436	252	-	210	364	436	252	168	124,7	149,6	
	CD6 1600-72H	71,72	86,06	-	-	-	398	230	478	276	-	230	398	478	276	184	192,5	231,0	
	CD6 801-82B	81,95	98,34	-	-	-	256	148	308	178	-	148	256	308	178	118	83,0	99,6	
	CD6 901-99B	98,58	118,3	-	-	-	294	170	353	204	-	170	294	353	204	136	99,2	119,0	

Standard version of the motor / contact our technical service for operating conditions not present in the catalog

非标电机请咨询技术部门

CD SERIES

Electric Motor LRA (Locked Rotor Ampere)

锁定转子电流 (堵转电流)

RANGE 系列	MODEL 型号	DISPLACEMENT 排量		LOCKED ROTOR CURRENT 锁定转子电流 V / ph / Hz [A]												
		50 Hz [m3/h]	60 Hz [m3/h]	220-240 / 1 / 50	208-230 / 1 / 60	115 / 1 / 60	220-240 / 3 / 50 265-290 / 3 / 60 D	380-420 / 3 / 50 440-480 / 3 / 60 Y	208-230 / 3 / 60 D	360-400 / 3 / 60 Y	200 / 3 / 50-60 D	380-420 / 3 / 50 440-480 / 3 / 60 PWS *	220-240 / 3 / 50 PWS *	208-230 / 3 / 60 PWS *	360-400 / 3 / 60 PWS *	475-525 / 3 / 50 570-630 / 3 / 60
CD200	CD150M	1,12	1,35	-	-	-	27,0	15,5	32,5	18,7	-	-	-	-	-	12,4
	CD 180H	1,12	1,35	-	-	-	35,0	20,0	41,5	24,0	-	-	-	-	-	16,0
	CD 180M	1,46	1,76	-	-	-	35,0	20,0	41,5	24,0	-	-	-	-	-	16,0
	CD 300H	1,46	1,76	-	-	-	42,0	24,5	51	29,5	-	-	-	-	-	19,6
	CD 300M	1,88	2,25	-	-	-	42,0	24,5	51	29,5	-	-	-	-	-	19,6
	CD 350H	1,88	2,25	-	-	-	55	32,0	66	38,5	-	-	-	-	-	25,5
	CD 350M	2,39	2,87	-	-	-	55	32,0	66	38,5	-	-	-	-	-	25,5
	CD 360H	2,39	2,87	-	-	-	76	43,5	91	52	-	-	-	-	-	35,0
	CD 360M	3,00	3,6	-	-	-	59	34,0	71	41,0	-	-	-	-	-	27,0
CD4	CD 380H	3,00	3,6	-	-	-	76	43,5	91	52	-	-	-	-	-	35,0
	CD4 55-4,7M	4,67	5,6	-	-	-	109	63	131	76	-	63	-	-	-	50
	CD4 75-4,7H	4,67	5,6	-	-	-	149	86	179	103	-	86	-	-	-	69
	CD4 75-6,4M	6,40	7,68	-	-	-	149	86	179	103	-	86	-	-	-	69
	CD4 90-6,4H	6,40	7,68	-	-	-	159	92	191	110	-	92	-	-	-	74
	CD4 75-7,3M	7,28	8,74	-	-	-	149	86	179	103	-	86	-	-	-	69
	CD4 90-7,3H	7,28	8,74	-	-	-	159	92	191	110	-	92	-	-	-	74
	CD4 90-9,2M	9,21	11,05	-	-	-	159	92	191	110	-	92	-	-	-	74
	CD4 120-9,2H	9,21	11,05	-	-	-	189	109	226	190	-	109	-	-	-	87
CD400	CD 1200M	9,48	11,37	-	-	-	233	135	280	162	-	135	233	280	162	108
	CD 1400H	9,48	11,37	-	-	-	295	171	354	205	-	171	295	354	205	136
	CD 1500M	11,69	14,03	-	-	-	295	171	354	205	-	171	295	354	205	136
	CD 2000H	11,69	14,03	-	-	-	306	177	367	212	-	177	306	367	212	142
	CD 1200B	13,84	16,61	-	-	-	233	135	280	162	-	135	233	280	162	108
	CD 2000M	13,84	16,61	-	-	-	306	177	367	212	-	177	306	367	212	142
	CD 2400H	13,84	16,61	-	-	-	351	203	421	244	-	203	351	421	244	162
	CD 1500B	15,72	18,86	-	-	-	295	171	354	205	-	171	295	354	205	136
	CD 2500H	15,72	18,86	-	-	-	351	203	421	244	-	203	351	421	244	162
	CD 2500M	17,84	21,41	-	-	-	351	203	421	244	-	203	351	421	244	162
	CD 3000H	17,84	21,41	-	-	-	424	245	509	294	-	245	424	509	294	196
	CD 2001B	20,15	24,18	-	-	-	306	177	367	212	-	177	306	367	212	142
	CD 3001M	20,15	24,18	-	-	-	424	245	509	294	-	245	424	509	294	196
	CD 3401H	20,15	24,18	-	-	-	450	260	540	312	-	260	450	540	312	208
	CD 2501B	23,3	27,96	-	-	-	351	203	421	244	-	203	351	421	244	162
	CD 3501H	23,3	27,96	-	-	-	450	260	540	312	-	260	450	540	312	208
	CD 3001B	26,45	31,74	-	-	-	424	245	509	294	-	245	424	509	294	196
	CD 3501M	26,45	31,74	-	-	-	450	260	540	312	-	260	450	540	312	208
	CD 4501H	26,45	31,74	-	-	-	559	323	671	388	-	323	559	671	388	258
	CD 3501B	31,04	37,25	-	-	-	450	260	540	312	-	260	450	540	312	208
	CD 5001M	31,04	37,25	-	-	-	559	323	671	388	-	323	559	671	388	258
	CD 4001B	35,47	42,56	-	-	-	502	290	602	348	-	290	502	602	348	232
	CD 5201M	35,47	42,56	-	-	-	559	323	671	388	-	323	559	671	388	258

Electric Motor LRA (Locked Rotor Ampere)

锁定转子电流（堵转电流）




RANGE 系列	MODEL 型号	DISPLACEMENT 排 量		LOCKED ROTOR CURRENT 锁定转子电流 V / ph / Hz [A]												
		50 Hz [m3/h]	60 Hz [m3/h]	220-240 / 1 / 50	208-230 / 1 / 60	115 / 1 / 60	220-240 / 3 / 50 265-290 / 3 / 60 D	380-420 / 3 / 50 440-480 / 3 / 60 Y	208-230 / 3 / 60 D	360-400 / 3 / 60 Y	200 / 3 / 50-60 D	380-420 / 3 / 50 440-480 / 3 / 60 PWS *	220-240 / 3 / 50 PWS *	208-230 / 3 / 60 PWS *	360-400 / 3 / 60 PWS *	475-525 / 3 / 50 570-630 / 3 / 60
CD600	CD6 501-40B	39,85	47,82	-	-	-	636	367	763	440	-	367	636	763	440	294
	CD6 601-40M	39,85	47,82	-	-	-	788	455	946	546	-	455	788	946	546	364
	CD6 701-40H	39,85	47,82	-	-	-	942	544	1131	653	-	544	942	1131	653	435
	CD6 501-45B	45,34	54,41	-	-	-	636	367	763	440	-	367	636	763	440	294
	CD6 701-45M	45,34	54,41	-	-	-	942	544	1131	653	-	544	942	1131	653	435
	CD6 801-45H	45,34	54,41	-	-	-	1012	584	1214	701	-	584	1012	1214	701	467
	CD6 501-53B	53,21	63,85	-	-	-	636	367	763	440	-	367	636	763	440	294
	CD6 801-53M	53,21	63,85	-	-	-	1012	584	1214	701	-	584	1012	1214	701	467
	CD6 901-53H	53,21	63,85	-	-	-	1143	660	1372	792	-	660	1143	1372	792	528
	CD6 1200-58H	57,65	69,18	-	-	-	1524	880	1829	1056	-	880	1524	1829	1056	704
	CD6 601-59B	59,53	71,44	-	-	-	788	455	946	546	-	455	788	946	546	364
	CD6 901-59M	59,53	71,44	-	-	-	1143	660	1372	792	-	660	1143	1372	792	528
	CD6 701-65B	64,49	77,39	-	-	-	942	544	1131	653	-	544	942	1131	653	435
	CD6 1200-65M	64,49	77,39	-	-	-	1524	880	1829	1056	-	880	1524	1829	1056	704
	CD6 1400-65H	64,49	77,39	-	-	-	1871	1080	2245	1296	-	1080	1871	2245	1296	864
	CD6 1400-72M	71,72	86,06	-	-	-	1871	1080	2245	1296	-	1080	1871	2245	1296	864
	CD6 1600-72H	71,72	86,06	-	-	-	2044	1180	2453	1416	-	1180	1871	2245	1296	864
	CD6 801-82B	81,95	98,34	-	-	-	1012	584	1214	701	-	584	1012	1214	701	467
	CD6 901-99B	98,58	118,3	-	-	-	1143	660	1372	792	-	660	1143	1372	792	528

* The current value refers to the direct connection.
带 * 号为直接连接电流

Standard version of the motor / contact our technical service for operating conditions not present in the catalog
表上黄色为标准电机。

Application Envelope

应用包络线

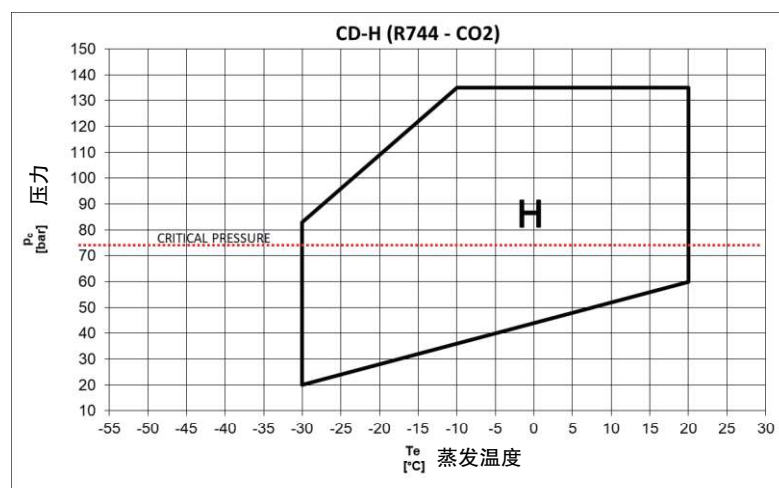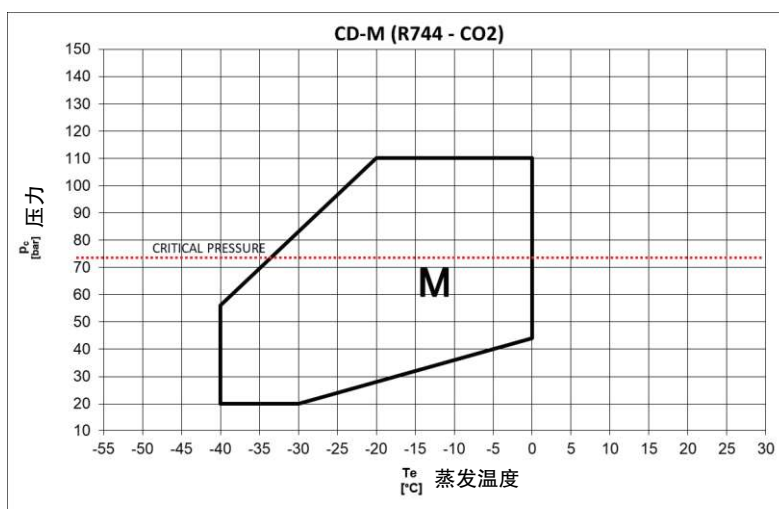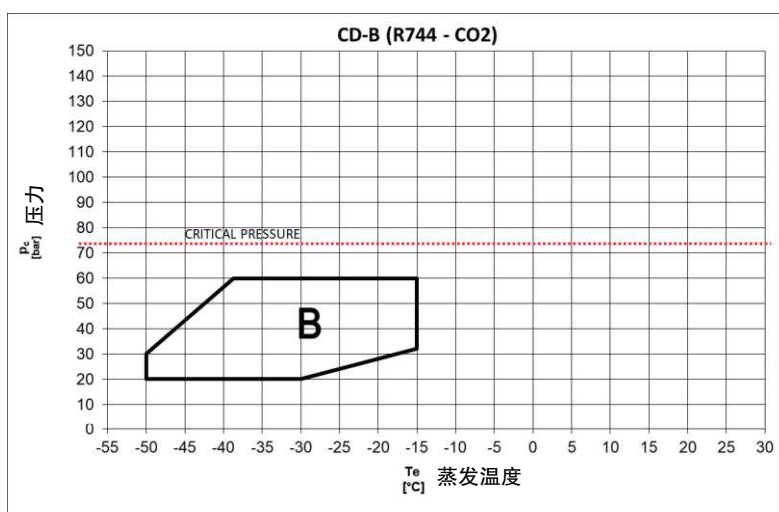

CD200-CD4-CD400

The application envelope changes with the compressor model and is available for every model in the DORIN web software




应用包络线随压缩机型号变化并且可以在都凌选型软件查到

Compressors application envelopes valid for superheat values lower than 10K

应用包络线内过热度低于10K

Application Envelope

应用包络线

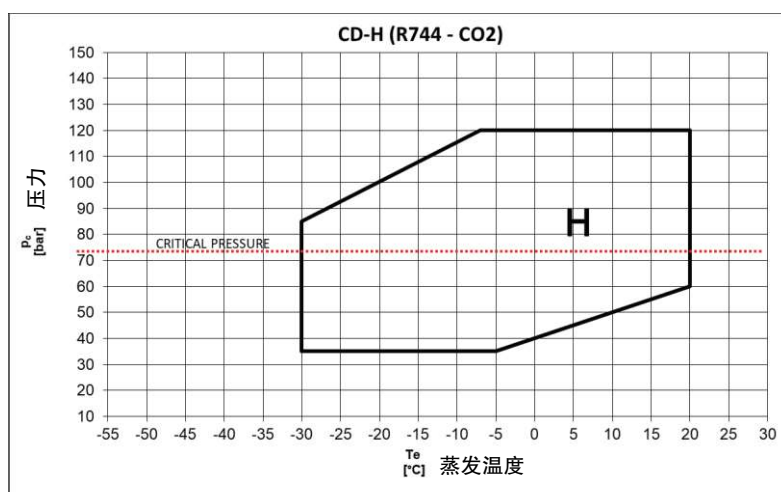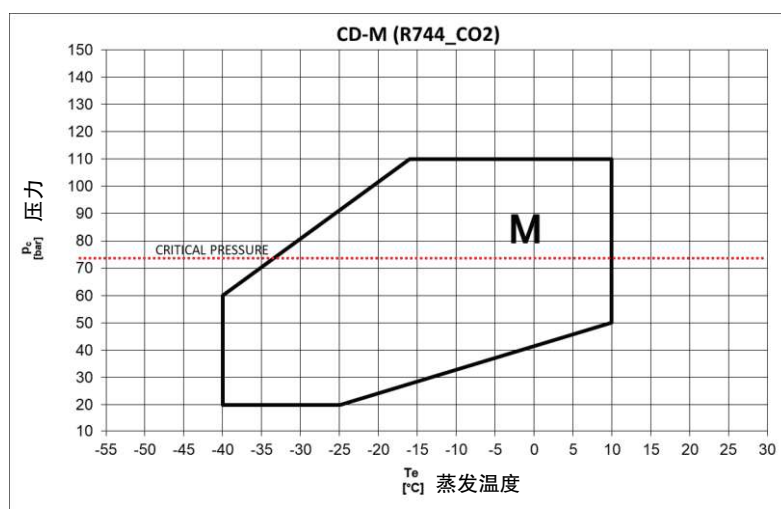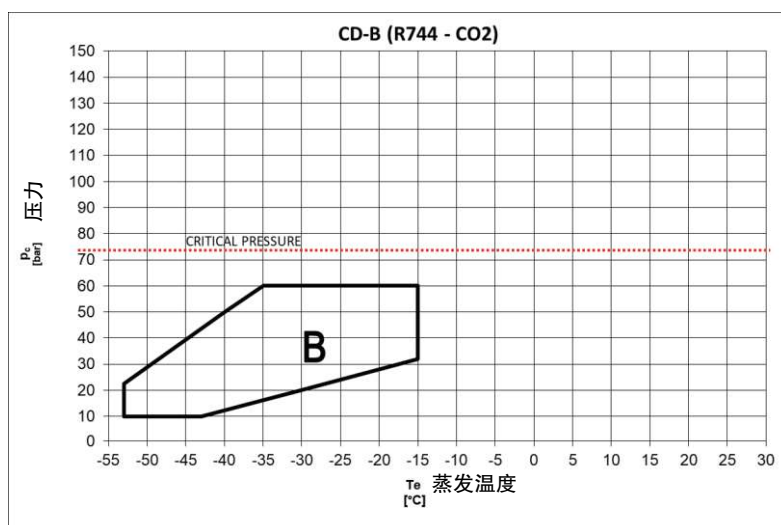

CD600

The application envelope changes with the compressor model and is available for every model in the DORIN web software

应用包络线随压缩机型号变化并且可以在都凌选型软件查到


Compressors application envelopes valid for superheat values lower than 10K

应用包络线内过热度低于10K

Technical Drawings


外形尺寸

CD200

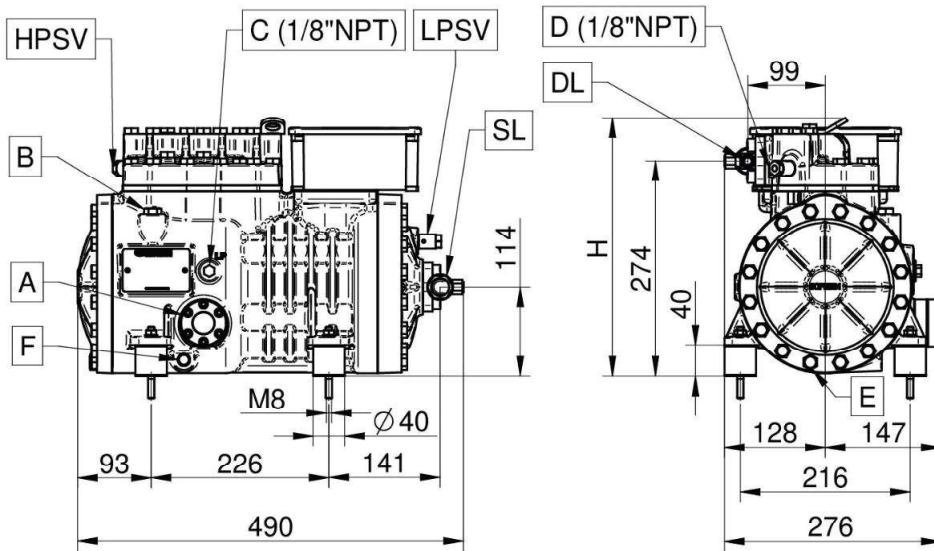

MODEL 型号	H (mm)
CD 150M	323
CD 180H	323
CD 180M	325
CD 300H	325
CD 300M	325
CD 350H	325
CD 350M	328
CD 360H	328
CD 360M	328
CD 380H	328

CD4

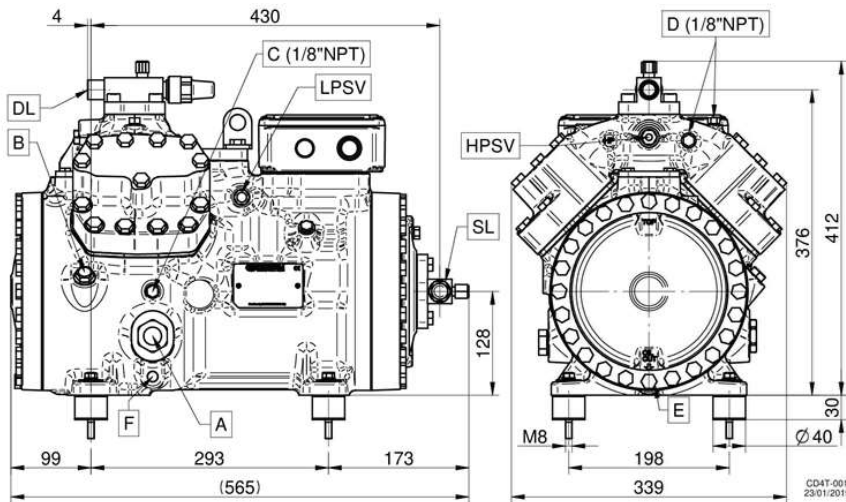

MODEL 型号
CD4 55-4,7M
CD4 75-4,7H
CD4 75-6,4M
CD4 90-6,4H
CD4 75-7,3M
CD4 90-7,3H
CD4 90-9,2M
CD4 120-9,2H


- A** - Oil sight - 油视镜
- B** - Oil charge plug - 注油塞
- C** - Low pressure tap - 低压旋塞
- D** - High pressure tap - 高压旋塞
- E** - Oil drain plug - 排油塞
- F** - Crankcase heater - 曲轴箱加热器

- G** - Oil return - 回油口
- DL** - Discharge service valve - 排气阀
- SL** - Suction service valve - 吸气阀
- LPSV** - Low pressure safety valve - 低压安全阀
- HPSV** - High pressure safety valve - 高压安全阀

Technical Drawings

外形尺寸

CD400

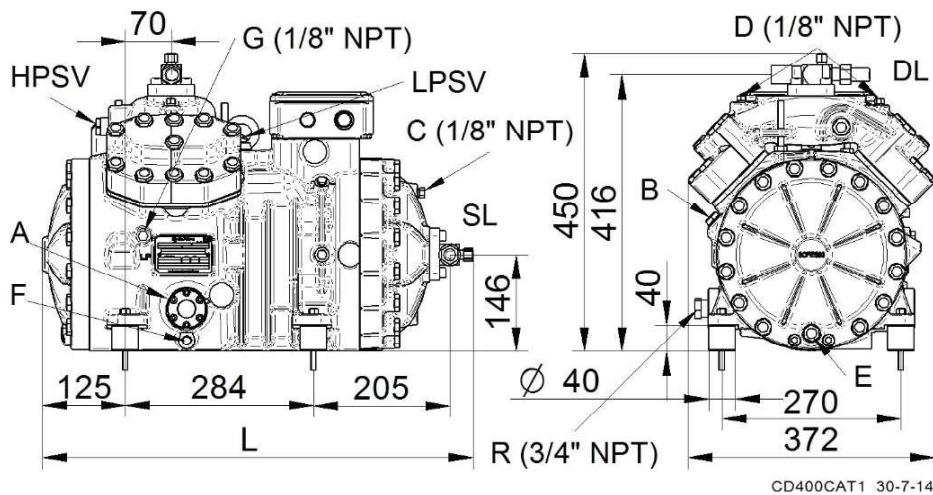


Figure/型 1

For the models with *, if equipped with oil pump (accessory on request) see for dimensions figure 2 (with L = 685 mm)

带*号的型号，如果有油泵，参考下图型2

MODEL 型号	Fig.	L (mm)	KS (mm)
CD 1200M	1	650	---
CD 1400H	1	650	---
CD 1500M *	1-2*	650	---
CD 2000H *	1-2*	650	---
CD 1200B *	1-2*	650	---
CD 2000M *	1-2*	650	---
CD 2400H *	1-2*	650	---
CD 1500B *	1-2*	650	---
CD 2500H *	1-2*	650	---
CD 2500M	2	690	208
CD 3000H	2	740	259
CD 2001B	2	690	208
CD 3001M	2	740	259
CD 3401H	2	740	259
CD 2501B	2	690	208
CD 3500H	2	740	259
CD 3001B	2	740	259
CD 3501M	2	740	259
CD 4501H	2	780	300
CD 3501B	2	750	264
CD 5001M	2	790	305
CD 4001B	2	790	305
CD 5201M	2	790	305

CD400

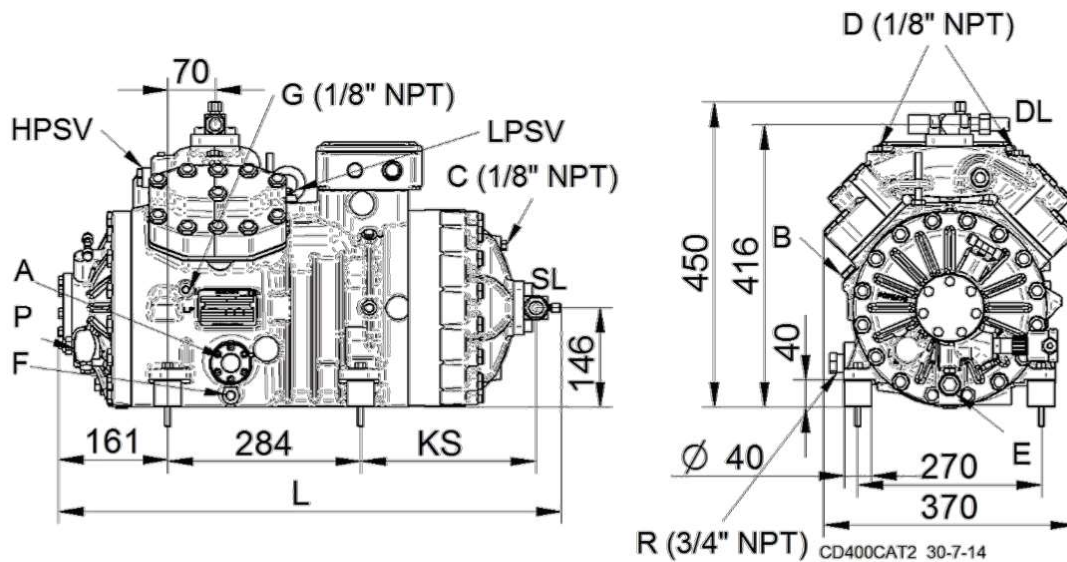

Figure/型 2


- A - Oil sight - 油视镜
- B - Oil charge plug - 注油塞
- C - Low pressure tap - 低压旋塞
- D - High pressure tap - 高压旋塞
- E - Oil drain plug - 排油塞
- F - Crankcase heater - 曲轴箱加热器

- G - Oil return - 回油口
- R - Oil level connection - 油平衡连接
- DL - Discharge service valve - 排气阀
- SL - Suction service valve - 吸气阀
- LPSV - Low pressure safety valve - 低压安全阀
- HPSV - High pressure safety valve - 高压安全阀

Technical Drawings

外形尺寸

CD600

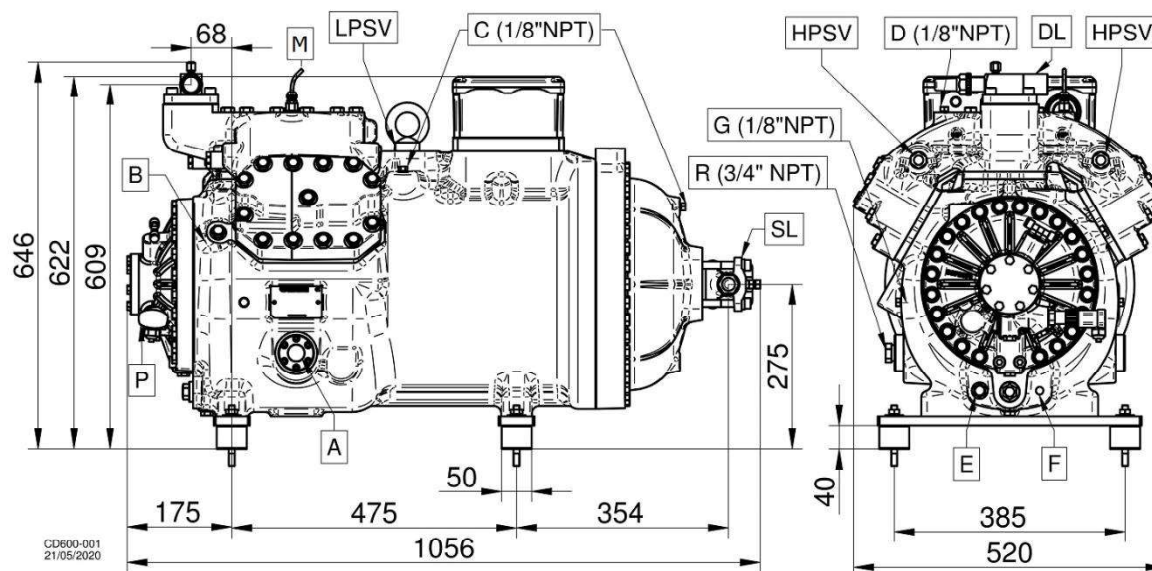MODEL
型号

CD6 501-40B
CD6 601-40M
CD6 701-40H
CD6 501-45B
CD6 701-45M
CD6 801-45H
CD6 501-53B
CD6 801-53M
CD6 901-53H
CD6 1200-58H
CD6 601-59B
CD6 901-59M
CD6 701-65B
CD6 1200-65M
CD6 1400-65H
CD6 1400-72M
CD6 1600-72H
CD6 801-82B
CD6 901-99B

- A** - Oil sight - 油视镜
- B** - Oil charge plug - 注油塞
- C** - Low pressure tap - 低压旋塞
- D** - High pressure tap - 高压旋塞
- E** - Oil drain plug - 排油塞
- F** - Crankcase heater - 曲轴箱加热器
- M** - Maximum discharge temperature sensor - 最大排气温度传感器

- G** - Oil return - 回油口
- P** - Oil pressure switch - 油压差开关
- R** - Oil level connection -
- DL** - Discharge service valve - 排气阀
- SL** - Suction service valve - 吸气阀
- LPSV** - Low pressure safety valve - 低压安全阀
- HPSV** - High pressure safety valve - 高压安全阀



DORIN WEB SOFTWARE

Open the camera app on your device and point it at the QR code to scan it. Make sure that all the four corners of the QR code are in view. A pop-up notification will appear on your screen, tap the notifications to launch the code.

Dorin都凌在线选型软件
扫描二维码，即可在线选型。



OFFICINE MARIO DORIN S.p.A.
Via Aretina 388, 50061 Compiobbi - Florence, Italy Tel.
+39 055 62321 1 - Fax +39 055 62321 380

dorin@dorin.com
www.dorin.com

全国统一服务电话：400-021-9890